



FIG. 1



RECEIVED HOY -8 2002 TECHROLOGY CENTER 2800

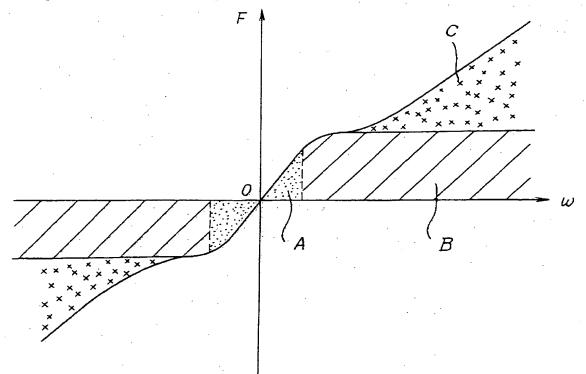

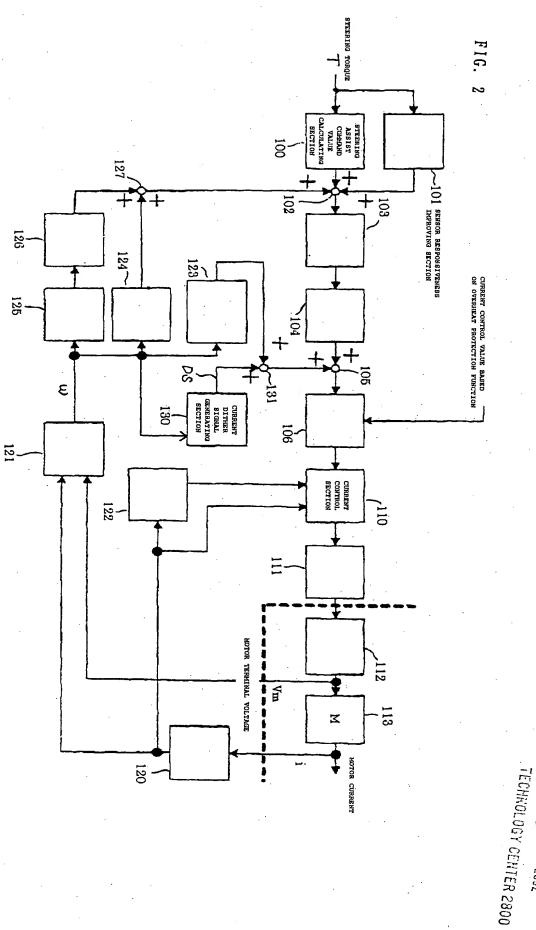

RECEIVED

NOV-8 2002



FIG. 3



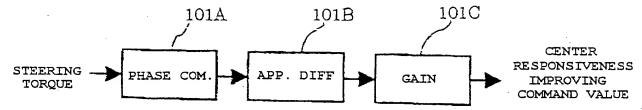


FIG. 4

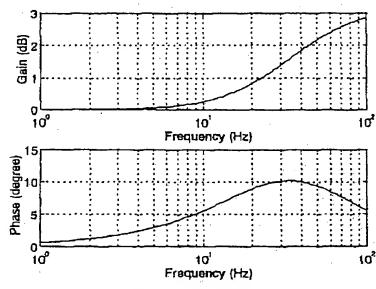


PHASE COMPENSATION

FIG. 5

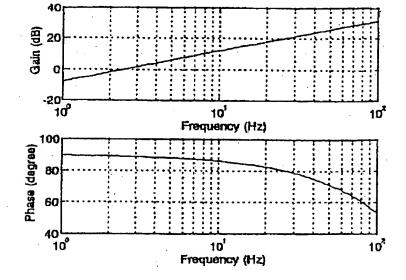


APPROXIMATE DIFFERENTIATION

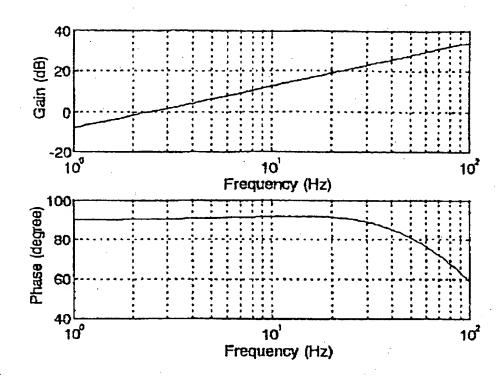


APPROXIMATE DIFFERENTIATION +
PHASE COMPENSATION



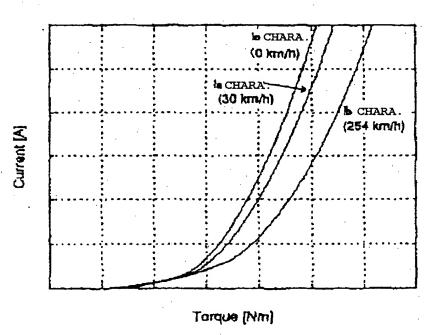


BASIC ASSIST CHARACTERISTIC



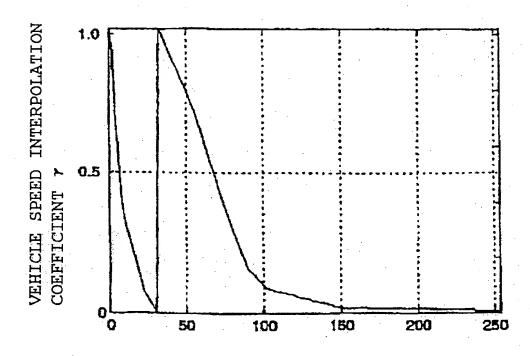

VEHICLE SPEED [km/h]



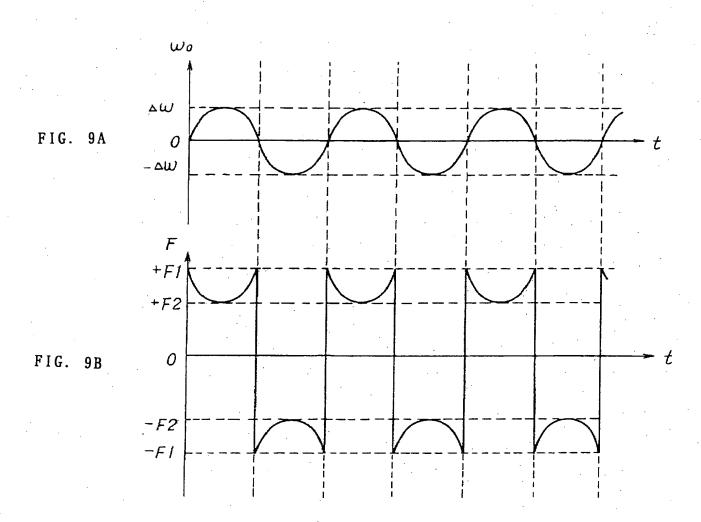

NOV -8 -2002
TECHNOLOGY CENTER 2800





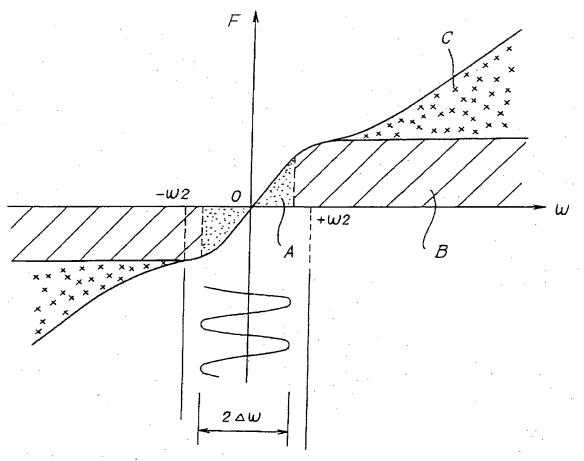


FIG. 11




RECEIVED
NOV -8 -2002
TECHNOLOGY CENTER 2800

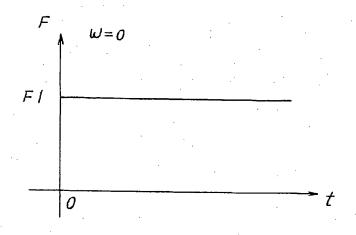

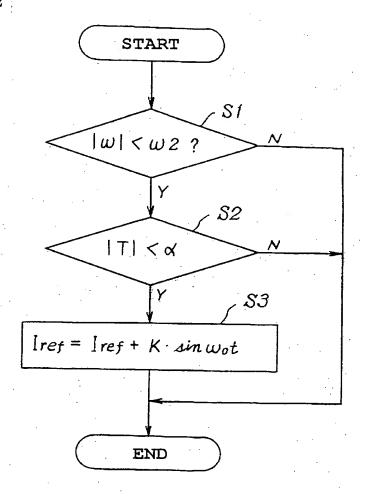

TECHNOLOGY CENTER 2800

IG. 13

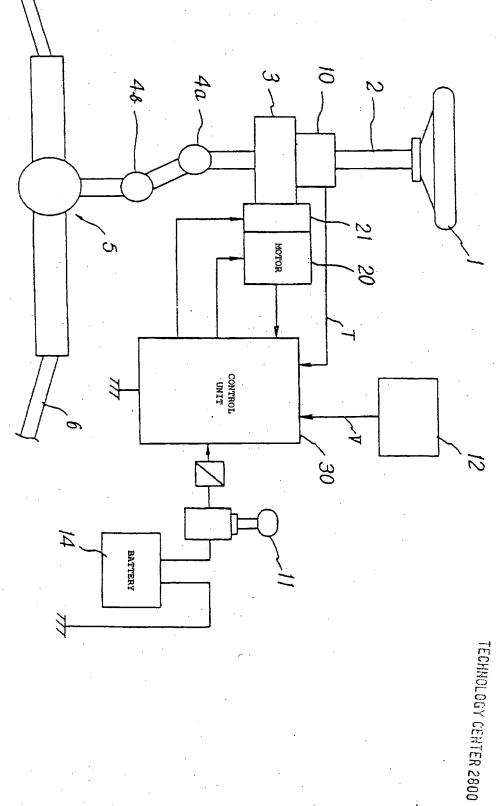

RECEIVED

NOV -8 2002


0 PHASE 32 STEERING
ASSIST
COMMAND
VALUE
CALCULATOR 30A Ч U ~ 36 Ì $\partial \mathcal{E}$


RECEIVED

NOV -8 2002 TECHNOLOGY CENTER 2800



FIG. 15

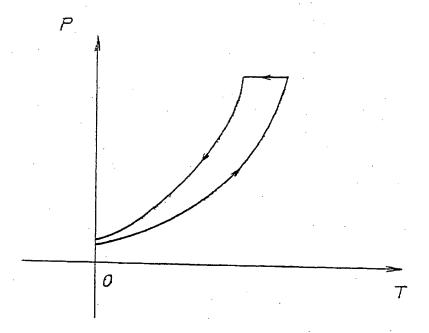

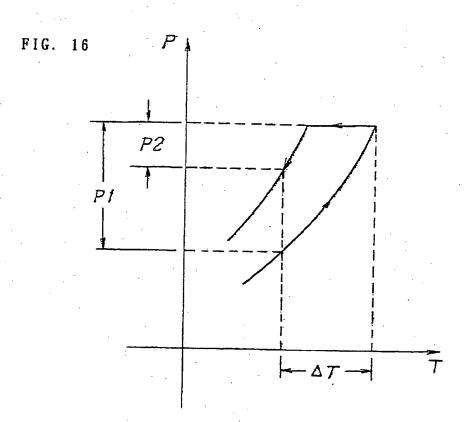


RECEIVED


NOV-8 2002

TECHNOLOGY CENTER 2800

FIG. 17

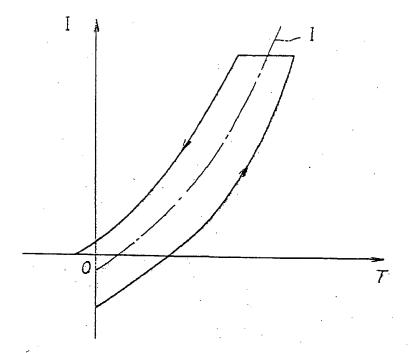



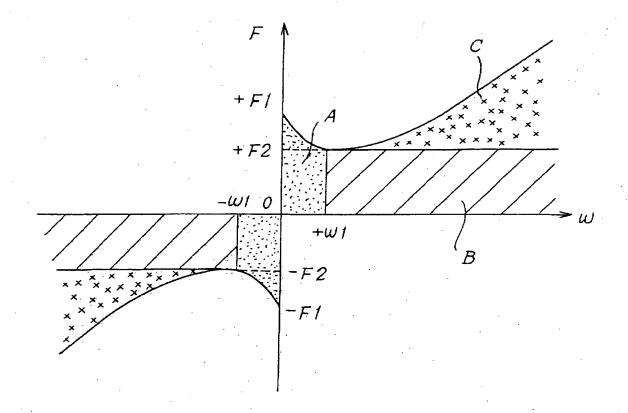

NOV -8 2002

TECHNOLOGY CENTER 2800